

SCA *Service Component Architecture*

Client and Implementation Model Specification for Spring

DRAFT VERSION

SCA Version 0.95, July 24, 2006

Technical Contacts:

Hal Hildebrand

hal.hildebrand@Oracle.com

Adrian Coyler

adrian.colyer@interface21.com

Michael Rowley

michael.rowley@bea.com

Jim Marino

jmarino@bea.com

Ken Tam

ken.tam@bea.com

Copyright Notice

1.1.1.1.

© Copyright BEA Systems, Inc., International Business Machines Corp, IONA Technologies, Oracle USA Inc, SAP AG., Siebel Systems, Inc., Sybase, Inc. 2006 All rights reserved.

License

The Service Component Architecture Specification is being provided by the copyright holders under the following license. By using and/or copying this work, you agree that you have read, understood and will comply with the following terms and conditions:

Permission to copy and display the Service Component Architecture Specification and/or portions thereof, without modification, in any medium without fee or royalty is hereby granted, provided that you include the following on ALL copies of the Service Component Architecture Specification, or portions thereof, that you make:

1. A link or URL to the Service Component Architecture Specification at these locations:

<http://dev2dev.bea.com/technologies/commonj/index.jsp>

<http://www.ibm.com/developerworks/library/specification/ws-sca/>

<http://www.iona.com/devcenter/sca/>

<http://oracle.com/technology/webservices/sca>

<https://www.sdn.sap.com/>

<http://www.sybase.com>

2. The full text of this copyright notice as shown in the Service Component Architecture Specification.

BEA, IBM, IONA, Oracle, SAP, Siebel, Sybase (collectively, the "Authors") agree to grant you a royalty-free license, under reasonable, non-discriminatory terms and conditions to patents that they deem necessary to implement the Service Component Architecture Specification.

THE Service Component Architecture SPECIFICATION IS PROVIDED "AS IS," AND THE AUTHORS MAKE NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, REGARDING THIS SPECIFICATION AND THE IMPLEMENTATION OF ITS CONTENTS, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT OR TITLE.

THE AUTHORS WILL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF OR RELATING TO ANY USE OR DISTRIBUTION OF THE SERVICE DATA OBJECTS SPECIFICATION.

The name and trademarks of the Authors may NOT be used in any manner, including advertising or publicity pertaining to the Service Component Architecture Specification or its contents without specific, written prior

permission. Title to copyright in the Service Component Architecture Specification will at all times remain with the Authors.

No other rights are granted by implication, estoppel or otherwise.

Status of this Document

This specification may change before final release and you are cautioned against relying on the content of this specification. The authors are currently soliciting your contributions and suggestions. Licenses are available for the purposes of feedback and (optionally) for implementation.

IBM is a registered trademark of International Business Machines Corporation in the United States, other countries, or both.

BEA is a registered trademark of BEA Systems, Inc.

IONA and IONA Technologies are registered trademarks of IONA Technologies plc.

Oracle is a registered trademark of Oracle Corporation.

SAP is a registered trademark of SAP AG.

Siebel is a registered trademark of Siebel Systems, Inc.

Sybase is a registered trademark of Sybase, Inc.

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.

Table of Contents

Copyright Notice	ii
License	ii
Status of this Document	iii
2. Spring Client and Implementation Model	1
2.1. Goals	1
2.2. Spring Application Context as Composite Implementation	1
2.2.1. Direct use of SCA references within Spring configurationl	2
2.2.2. Explicit declaration of SCA related beans inside Spring configuration	3
3. Appendix	5
3.1. SCAAdapter interface	5
3.2. Spring SCA Namespace schema	5
3.3. References	7

2. Spring Client and Implementation Model

2.1. Goals

The SCA Java Client and Implementation model for Spring specifies the how the Spring Framework can be used with SCA. The goals of this effort are:

Coarse-grained integration: The integration with Spring will be at the SCA Composite level, where a Spring application context provides a complete composite, exposing services and using references via SCA. This means that a Spring application context defines the internal structure of a composite implementation.


Start from SCA Component Type: It should be possible to use Spring to implement any SCA Composite that uses WSDL or Java interfaces to define services, possibly with some SCA specific extensions.

Start from Spring context: It should be possible to use any valid Spring application context as the implementation of a component within SCA. In particular, it should be possible to generate an SCA Composite from any Spring context and use that composite within an SCA assembly.

2.2. Spring Application Context as Composite Implementation

A Spring Application Context is used as an implementation within an SCA composite component. Conceptually, this may be represented as follows:

Figure 1 below illustrates a simple SCA system composed of two composites, both of which are implemented by Spring application contexts.

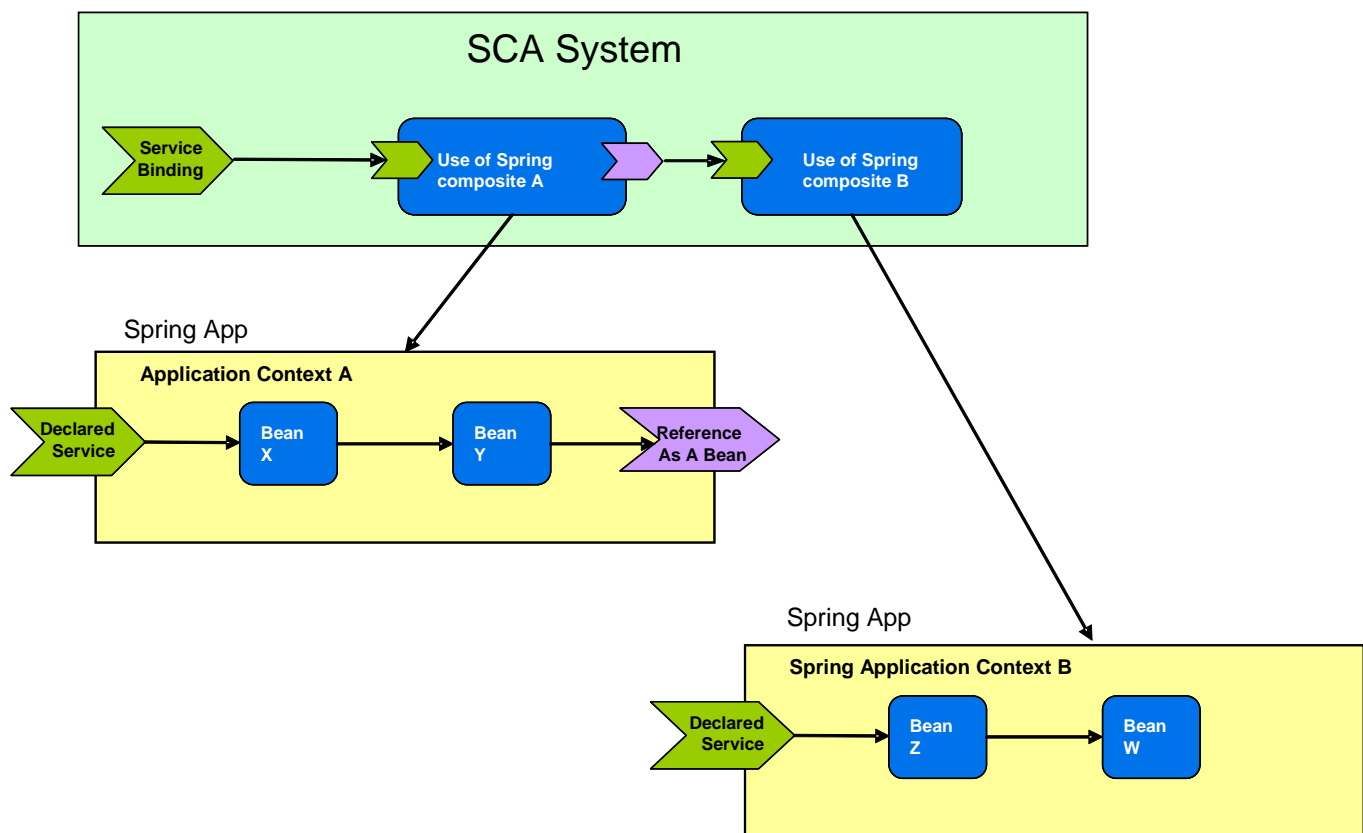


[NOTE: "Reference as Bean" should be just "reference"]

Figure 1 SCA System with two Spring application contexts as composite components

In this figure, there are two composites defined by separate Spring Application Contexts, each with one declared service. Composite A is composed of two Spring beans, and bean X is exposed to SCA through an SCA service. Bean Y has a reference to an external SCA service. This service reference is wired to another Spring context, Composite B, which has a single declared service entry point, which is wired to Bean Z.

A component that uses Spring for an implementation may take two forms. The first scenario allows SCA services and references to be wired without introducing SCA metadata into the Spring configuration. Alternatively SCA references may be defined as beans in the Spring configuration, enabling for example the use of Spring AOP with beans representing SCA services.

In both models the Spring context knows very little about the SCA environment. All policy enforcement occurs in the SCA runtime implementation and does not enter into the Spring space.

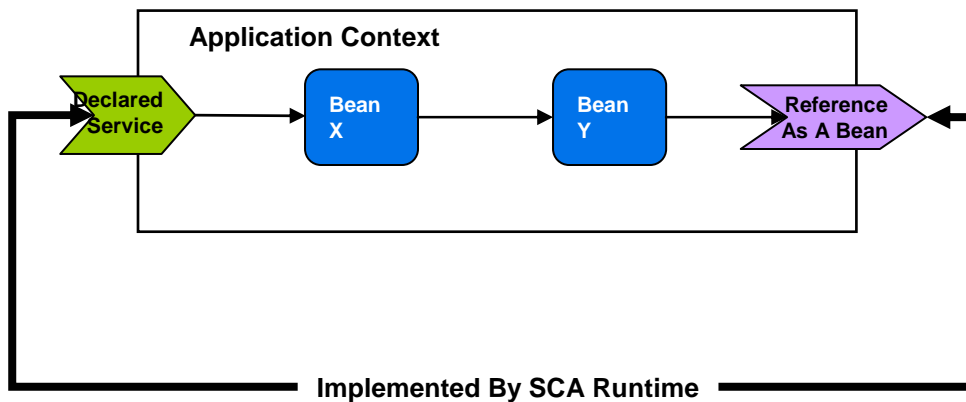

[NOTE: "Reference as Bean" should be just "reference"]

Figure 2

Figure 2 shows two of the points where the SCA runtime interacts with the Spring context: services and references. Any policy enforcement is done by the SCA runtime on calls into the Spring application context before the final message is delivered to the target Spring bean. On outbound calls from the application context, references supplied by the SCA may provide policy enforcement

2.2.1. Direct use of SCA references within a Spring configuration

The SCA runtime hosting the Spring application context implementing a composite creates a parent application context in which all SCA references are defined as beans using the SCA reference name as the bean name. These beans are automatically visible in the child (user application) context.

The following Spring configuration provides a model for Spring application context A, expressed in figure 1 above. In this example, there are two Spring beans, X and Y. The bean named "X" is the entry point from SCA into the Spring context and Spring bean Y contains a reference to a service supplied by SCA.

```
<beans>
  <bean id="X" class="org.xyz.someapp.SomeClass">
    <property name="foo" ref="Y"/>
  </bean>
  <bean id="Y" class="org.xyz.someapp.SomeOtherClass">
```

```

        <property name="bar" ref="SCAReference" />
    </bean>
</beans>

```

In words, two beans are defined. The bean named “X” contains one property (i.e. reference) named “foo” which refers to the second bean in the context, named “Y”. The bean “Y” also has a single property named “bar” which refers to the SCA service reference, given the name “SCAReference”

The SCA SCDL contains service and reference definitions for the Spring composite with appropriate binding information:

```

<composite name="BazComposite">
  <component name="SpringComponent">
    <implementation.spring location=".." />
    <service name="SCAService">
      <target>X</target>
    </service>
    <reference name="SCAReference" .../> <!-- binding info specified -->
  </component>
</composite>

```

The only part of this that is specific to Spring is the `<implementation.spring>` element. The `location` attribute of that element specifies the target uri of an archive file or directory that contains the Spring application context files. The resource paths to the Spring application context configuration files that are used to create the application context are then identified as follows:

If the resource identified by the location attribute is an archive file, then the file META-INF/MANIFEST.MF is read from the archive. If the location URI identifies a directory, then META-INF/MANIFEST.MF must exist underneath that directory. If the manifest file contains a header "Spring-Context" of the format:

```
Spring-Context ::= path ( ',' path )*
```

Where path is a relative path with respect to the location URI, then the set of paths specified in the header identify the context configuration files. If there is no MANIFEST.MF file or no Spring-Context header within that file, then a default of META-INF/application-context.xml is assumed.

Note that the `<service>` element has a target named “X”. This is mapped to the Spring bean of the same name in the application context. The SCDL also contains the `<reference>` element named “SCAReference”, which referred to by bean “Y” in the Spring configuration above.

The SCA runtime is responsible for setting up the references and exposing them as beans with their indicated names in the spring context. This is usually accomplished by creating a parent context which has the appropriate beans defined and the context supplied by the implementation becomes the child of this context. Thus, the references – e.g. the “SCAReference” that bean “Y” uses for it’s “bar” property – are available to the context.

2.2.2. Explicit declaration of SCA related beans inside a Spring configuration

It is also possible to explicitly declare SCA-related beans inside a Spring configuration to proxy SCA references. When inheriting bean definitions created by an SCA runtime in a parent context, a bean defined in the child context with the same name as one in the parent context overrides it. There are two reasons you may wish to explicitly declare a bean that refers to an SCA service. One is to have the Spring container decorate the bean (using Spring AOP for example); another is for use when a Spring application context that is not created by an SCA runtime (and hence has no implicit parent context) wants to interact with SCA.

A reference to an SCA service (known as an SCA reference) is declared using the Spring SCA namespace support [AMC note: we should provide the schema as an appendix to this document].

For example, to declare a bean that represents the service referred to by an SCA reference named "SCAReference" (as discussed in section 2.2.1) you would declare the following:

```
<sca:reference name="SCAReference" type="com.xyz.SomeType"/>
```

The Spring SCA namespace support provides four elements in total. These are:

<sca: reference> This element defines a Spring bean representing an SCA service which is external to the Spring application context.

<sca: property> This element defines a Spring bean which represents a property of the SCA component which configures the Spring composite [NOTE: need a property example]

<sca: service> This element defines the beans that the Spring composite exposes as services. It functions to provide component type information for the Spring composite. Specifically, the SCA runtime is responsible for creating the proper service bindings and applying required policies to those services based on SCDL configuration. If a <sca:service> entry is not configured in the parent SCDL, the SCA runtime must throw a configuration error. If no <sca:service> elements are specified in the Spring application context, any bean may be exposed as a service. .

The following example show an application context that exposes one service, SCAService, and proxies an SCA reference, SCAReference. In this case, the parent SCA composite must specify a configuration for SCAService, including providing a binding and any applicable policy:

```
<beans>
  <!--define the adapter needed for communicating with SCA, the component attribute
    names the SCA component used for resolving references -->
  <sca:composite component="SpringComponent"
    sca-adapter-class="com.scaProvider.springframework.ScaMediator" />

  <sca:reference name="SCAReference" type="com.xyz.SomeType"/>

  <bean name="X">
    <property name="foo" ref="Y"/>
  </bean>

  <bean name="Y">
    <property name="bar" ref="SCAReference"/>
  </bean>

  <!--expose the bean "X" as an sca service named "SCAService" -->
  <sca:service name="SCAService" type="org.xyz.someapp.SomeInterface" target="X"/>

</beans>
```

3. Appendix

3.1. SCAAdapter interface

```
package org.springframework.sca;

public interface ScaAdapter {

    Object getServiceReference(
        String referenceName,
        Class referenceType,
        String componentName,
        String defaultServiceName);

    Object getPropertyReference(
        String propertyName,
        Class propertyType,
        String componentName);

    void publishAsService(
        Object serviceImplementation,
        Class serviceInterface,
        String serviceName,
        String componentName);

}
```

3.2. Spring SCA Namespace schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns="http://www.springframework.org/schema/sca"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  attributeFormDefault="unqualified"
  elementFormDefault="qualified"
  targetNamespace="http://www.springframework.org/schema/sca">

  <xsd:element name="composite">
    <xsd:complexType>
      <xsd:attribute name="component" use="required">
        <xsd:simpleType>
          <xsd:restriction base="xsd:string"/>
        </xsd:simpleType>
      </xsd:attribute>
      <xsd:attribute name="sca-adapter-class" use="optional">
```

```

        <xsd:simpleType>
            <xsd:restriction base="xsd:string"/>
        </xsd:simpleType>
    </xsd:attribute>
</xsd:complexType>
</xsd:element>

<xsd:element name="reference">
    <xsd:complexType>
        <xsd:attribute name="name" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="type" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="default" use="optional">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
    </xsd:complexType>
</xsd:element>

<xsd:element name="property">
    <xsd:complexType>
        <xsd:attribute name="id" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="name" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="type" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
    </xsd:complexType>
</xsd:element>

<xsd:element name="service">
    <xsd:complexType>
        <xsd:attribute name="name" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="type" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="target" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string"/>
            </xsd:simpleType>
        </xsd:attribute>
    </xsd:complexType>
</xsd:element>

```

```
        </xsd:simpleType>
      </xsd:attribute>
    </xsd:complexType>
  </xsd:element>

</xsd:schema>
```

3.3. References

[1] Spring

<http://static.springframework.org/spring/docs/2.0.x/reference/index.html>